

# DISPLAY 2000/G7

31 m  
IP41



## DISPLAY 2000/G7

With a viewing distance of 31 m, the Display 2000/G7 is unmistakable. Whether as a system or rechargeable battery version, this exit sign luminaire is game-changing. Particularly suitable for shopping centres, schools and airports.



Viewing distance	31 m	
Degree of protection	IP41	
Class	I	
Enclosure material	Sheet steel	
Enclosure colour/surface	RAL 9016 (white)	
Terminal block	3 x 2.5 <sup>2</sup> for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	3.6 V/2.5 Ah (NiCd)	


VERSIONS

1 h with auto-check   with BUS check		•   •
3 h with auto-check   with BUS check		•   •
8 h with auto-check   with BUS check		•   •
without monitoring module	•	
with monitoring module	•	
with DALI monitoring	•	
Cinema version	•	
Luminous flux in normal mode 10 %		


OPTIONS /ACCESSORIES

- Enclosure made of brushed stainless steel
- Ball guard
- Other RAL colours on request


WALL MOUNTED

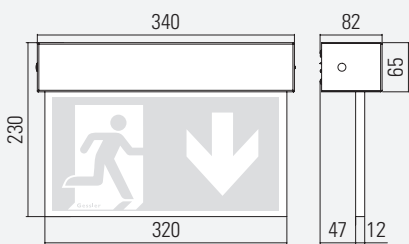


CEILING MOUNTED

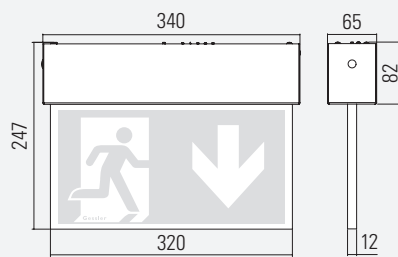

PENDANT

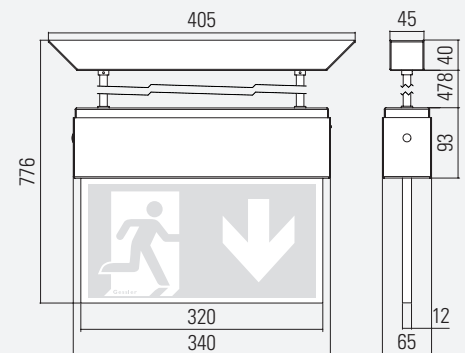

EYE INSTALLATION

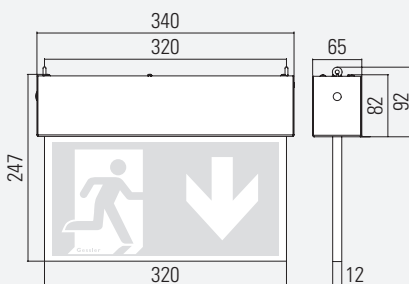

WALL BRACKET MOUNTING

