


EXIT SIGN CUBE B35

35 m
IP54 | IK08

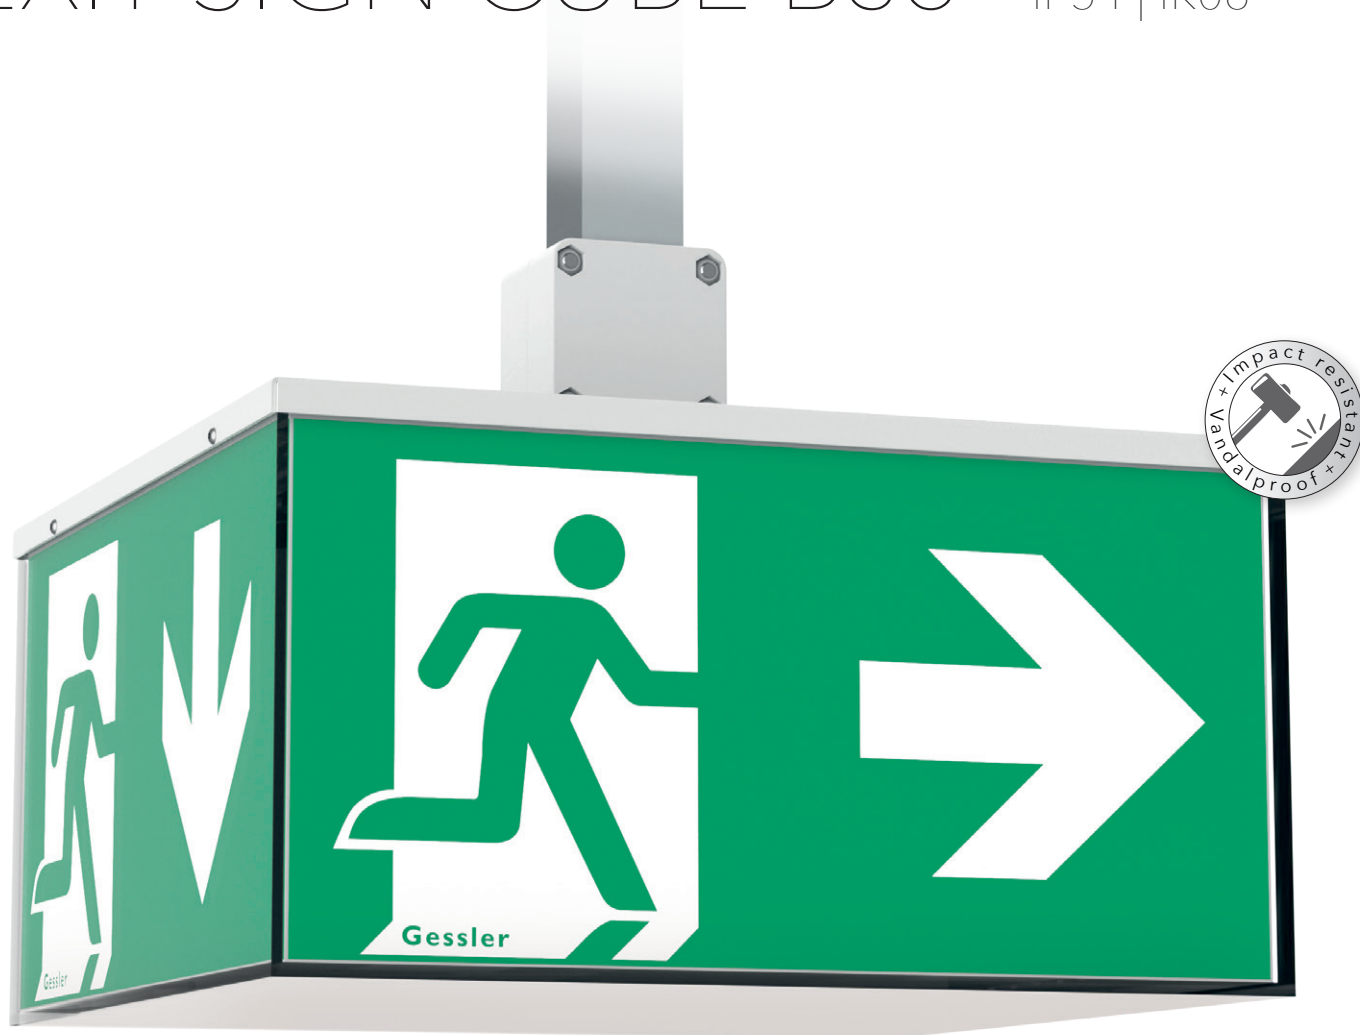

EXIT SIGN CUBE B35

The B35 has the ability to take blows. The cube head of the exit sign luminaire is impact resistant, vandalism-proof and, thanks to the high degree of protection, it is suitable for use in public areas.



EXIT SIGN CUBE B35 SYSTEM LUMINAIRE RECHARGEABLE BATTERY LUMINAIRE

Viewing distance	35 m	
Degree of protection	IP54	
Impact resistance	IK08	
Class	II	
Enclosure material	Polycarbonate /sheet steel	
Enclosure colour/surface	RAL 9016 (white)	
Terminal block	3 x 2.5 [□] for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/6.0 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	2x 3.6 V/2.5 Ah (NiCd)	

VERSIONS

1 h with auto-check with BUS check	• •
3 h with auto-check with BUS check	
8 h with auto-check with BUS check	
without monitoring module	•
with monitoring module	•
with DALI monitoring	•
Cinema version	
Luminous flux in normal mode 10 %	


SPECIAL FEATURE

- High degree of protection (IP54)
- The luminaire head can be dismantled as a closed unit
- Impact resistant housing
- Voltage-free fault indication contact (rechargeable battery luminaire)
- Pictogram set included


OPTIONS /ACCESSORIES

- Other RAL colours on request


B35D CEILING MOUNTED

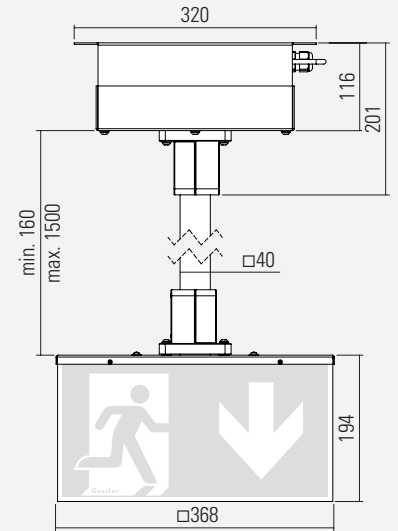

B35T TELESCOPIC INSTALLATION

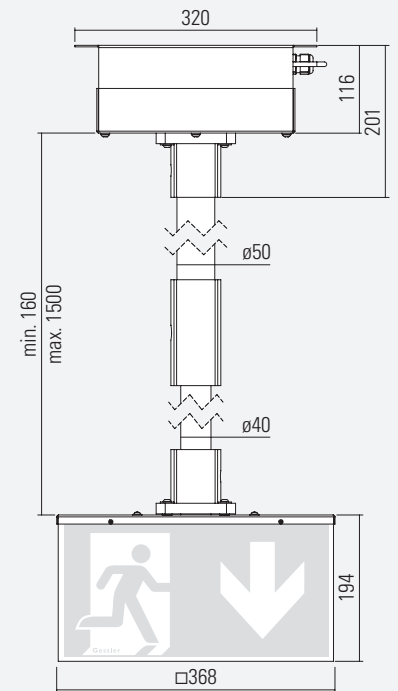

B35W WALL BRACKET MOUNTING

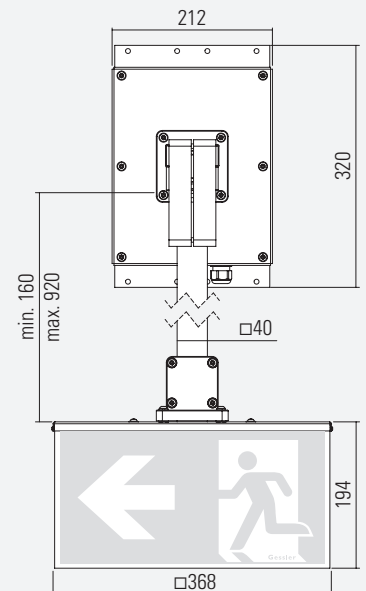

WALL BRACKET MOUNTING

Supply unit

As rechargeable battery luminaire with optional voltage-free signalling contact

Variable length

Can be shortened on site and adapted to the local circumstances

Coupling

The LED cube head can be uncoupled, if necessary, using a special key

Vandalproof cube head

made of impact resistant polycarbonate

