

# LUMINA 2000/1

16 m  
IP44



## LUMINA 2000/1

Low ceilings or no space above the door? Then the Lumina 2000/1 is the right choice. The universal plastic enclosure is available in 5 installation types and despite its compact design, it has a viewing distance of 16 m.



LUMINA 2000/1	SYSTEM LUMINAIRE	RECHARGEABLE BATTERY LUMINAIRE
Viewing distance	16 m	
Degree of protection	IP44	
Class	I	
Enclosure material	Polycarbonate	
Enclosure colour/surface	white	
Terminal block	3 x 2.5 <sup>□</sup> for through wiring	
Light source	LED	
Ambient temperature	-20° C to +40° C	0° C to +40° C
Connected load (AC/DC)	10.0 VA/5.5 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	-	3.6 V/2.5 Ah (NiCd)

#### VERSIONS

1 h with auto-check   with BUS check		•   •
3 h with auto-check   with BUS check		•   •
8 h with auto-check   with BUS check		•   •
without monitoring module	•	
with monitoring module	•	
with DALI monitoring	•	
Cinema version	•	
Luminous flux in normal mode 10 %		

#### OPTIONS /ACCESSORIES

- Ball guard


**L01W** WALL MOUNTED




**L01D** CEILING MOUNTED



**L01P** PENDANT

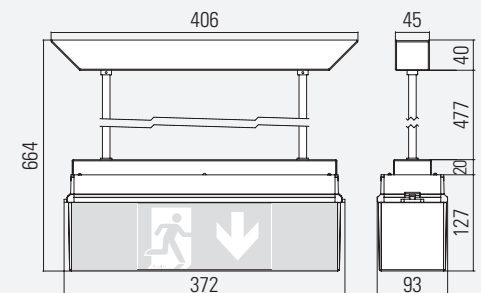

**L01Ö** EYE INSTALLATION

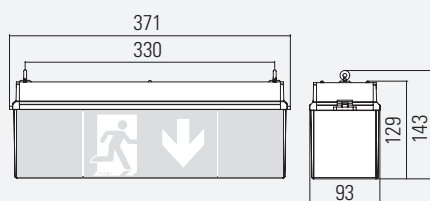

**L01A** WALL BRACKET MOUNTING

