

LUMINA 2000/27

38 m
IP40 | IK10



LUMINA 2000/27

In sports facilities it's not unusual for a ball to miss its target. Not a problem for the Lumina 2000/27, because the exit sign luminaire was especially developed for installation in rebound walls, and thanks to its impact resistant polycarbonate cover, it skilfully repels even the hardest shots.



LUMINA 2000/27 SYSTEM LUMINAIRE RECHARGEABLE BATTERY LUMINAIRE

| | | |
|--------------------------|---|-----------------------|
| Viewing distance | 38 m | |
| Degree of protection | IP40 | |
| Impact resistance | IK10 | |
| Class | I | |
| Enclosure material | Sheet steel | |
| Enclosure colour/surface | RAL 9016 (white) | |
| Terminal block | 3 x 2.5 [□] for through wiring | |
| Light source | LED | |
| Ambient temperature | -20° C to +40° C | 0° C to +40° C |
| Connected load (AC/DC) | 17.5 VA/8.2 W | |
| Supply voltage | 230V ± 10 %, 50/60 Hz/176-275 V DC | 230V ± 10 %, 50/60 Hz |
| Rechargeable battery | 3.6 V/4 Ah (NiCd) | |

VERSIONS

| | | |
|--------------------------------------|---|-------|
| 1 h with auto-check with BUS check | | • • |
| 3 h with auto-check with BUS check | | • • |
| 8 h with auto-check with BUS check | | |
| without monitoring module | • | |
| with monitoring module | • | |
| with DALI monitoring | • | |
| Cinema version | • | |
| Luminous flux in normal mode 10 % | | |


SPECIAL FEATURE

- Pictogram set included
- Enclosure resistant to ball throwing - suitable for sports facilities


OPTIONS / ACCESSORIES

- Other RAL colours on request

L27E RECESSED WALL INSTALLATION

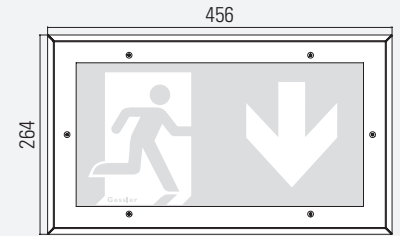

Wall cutout (H x W x D):
240 mm x 430 mm x 95 mm



Easy installation due to height-adjustable fastening clips

Rechargeable battery luminaire with LED status display