

PRIMUS PS4

Stainless steel
IP65



PS4D | IP65 | SYSTEM LUMINAIRE
RECHARGEABLE BATTERY LUMINAIRE



PS4E | IP65 | SYSTEM LUMINAIRE
RECHARGEABLE BATTERY LUMINAIRE

Our PS4 is a real all-rounder. The high degree of protection and the impact resistant enclosure designed to be resistant to ball throwing makes the PS4 the right choice for sports facilities, public areas, swimming pools and food production facilities (IFS standard and HACCP regulation).

Degree of protection	IP65	
Class	I	
Enclosure material	Stainless steel	
Enclosure colour/surface	Brushed	
Terminal block	3 x 2.5 [□] for through wiring	
Light source	4 x 1 W power LED	
Ambient temperature	-20° C up to +40° C	0° C up to +40° C
Connected load (AC/DC)	13.2 VA/6.7 W	
Supply voltage	230V ± 10 %, 50/60 Hz/176-275 V DC	230V ± 10 %, 50/60 Hz
Rechargeable battery	3.6 V/2.5 Ah (NiCd)	

VERSIONS

1 h with auto-check with BUS check		•* •*
3 h with auto-check with BUS check		•* •*
8 h with auto-check with BUS check		•* •*
without monitoring module	•	
with monitoring module	•	
with DALI monitoring	•	


SPECIAL FEATURE

- High degree of protection (IP65)
- Version resistant to ball throwing- suitable for sports facilities
- Chlorine-resistant enclosure- suitable for swimming pools
- Fulfils the IFS standard and the HACCP regulation (food industry)


OPTIONS /ACCESSORIES

- Remote supply unit (rechargeable battery luminaire) for mounting in temperature controlled area. Connection cable max. 4 m (2.5 mm²) provided on site*.
- Concrete adapter for surface-mounted installation
- Wall bracket arm (lockable in 15° increments)
- Aluminium enclosure in RAL 9016 (white) and RAL 7024 (graphite grey) | Other colours on request


PS4D CEILING MOUNTING



CEILING MOUNTING MIT BETONADAPTER




PS4E RECESSED CEILING MOUNTING



Ceiling cutout: 170 x 170 mm
Maximum ceiling thickness: 42 mm

PS4A WALL BRACKET MOUNTING

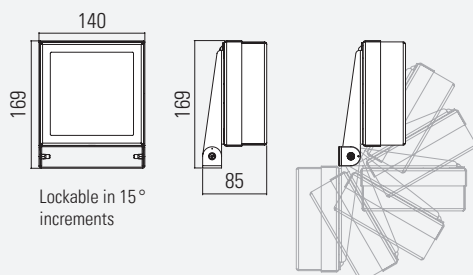

*REMOTE SUPPLY UNIT (OPTIONAL)

